
NOTES

- 1. LOCATE UNDERGROUND UTILITIES PRIOR TO DIGGING. CALL USA (UNDERGROUND SERVICE ALERT) 1-800-277-2600, MON THRU FRI 6AM TO 7PM, A MINIMUM 2 WORKING DAYS WITH A MAXIMUM 14 CALENDAR DAYS, TO OBTAIN A TICKET. CONTACT THE DISTRICT INSPECTOR OR PARK SUPERVISOR FOR DISTRICT UTILITIES NOT LOCATED BY USA.
- 2. WOOD POST SHALL BE S4S NO. 1 OR NO. 2 HEART STRUCTURAL REDWOOD PER THE "STANDARD SPECIFICATIONS FOR GRADES OF CALIFORNIA REDWOOD LUMBER" AS PUBLISHED BY THE WESTERN WOOD PRODUCTS ASSOCIATION (WWPA).
- 3. USE A 4X4 MIN POST WHERE TOTAL SIGN AREA DOES NOT EXCEED 3.5 SF. FOR EXAMPLE, A 12" X 18" SIGN (1.5 SF) COMBINED WITH A 6" X 12" SIGN (0.5 SF) WOULD HAVE A TOTAL AREA OF 2.0 SF. FOR LARGER SIGN AREAS, USE A 6X6 POST.
- 4. THE BOTTOM OF THE LOWEST SIGN PANEL SHALL BE A MINIMUM OF 80" ABOVE THE SURROUNDING SURFACE GRADE, EXCEPT THAT SIGNS INSTALLED OUTSIDE OF TRAVEL ROUTES, SUCH AS IN A PLANTER, MAY BE LOWERED TO 72" ABOVE SURROUNDING SURFACE GRADE. SPECIAL CONDITIONS, SUCH AS ACCESSIBLE PARKING SIGNS AND TREADLE WARNING SIGNS, MAY SUPERSEDE THESE TYPICAL REQUIREMENTS.



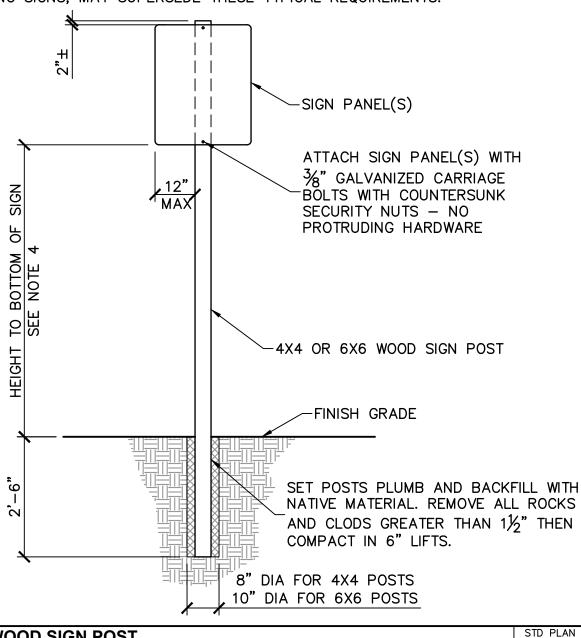

SINGLE WOOD SIGN POST

REVIEWED BY THE PARK STANDARDS COMMITTEE, AND APPROVED BY THE CHIEF OF DESIGN & CONSTRUCTION

Lgaz

04/06/2022

302 SHEET 1 OF 1

EAST BAY REGIONAL PARK DISTRICT - STANDARD PLANS